

GLOBAL JOURNAL OF ENGINEERING SCIENCE AND RESEARCHES

INCLINATION OF SIDE OUTLET TAIL PIPE OF MUFFLER TO OBSERVE THE PERFORMANCE OF TRANSMISSION LOSS

Amit Kumar Gupta

Mechanical Engineering Department, IET-Devi Ahilya University, INDORE

ABSTRACT

A muffler is an important noise control element for reduction of machinery exhaust noise, fan noise, and other noise sources involving the flow of gases. Mufflers are typically arranged along the exhaust pipe as the part of the exhaust system of an internal combustion engine to reduce its noise. This paper shows the improvement on muffler transmission loss by inclination of side outlet tail pipe of muffler. Reactive muffler consist three basic elements like inlet pipe, outlet pipe and expansion chamber. Here single expansion chamber with side outlet configuration is used. Now, the transmission loss performance is observed by inclination of side outlet tail pipe. Firstly simulation tool results (Comsol, wave 1-D) are compared with experimentally then results are observed with various expansion ratio. Than Comsol tool is used to observe the transmission loss of muffler with different configuration.

Keywords: Reactive Muffler, FEA Acoustic Module- Comsol, wave 1-D, Sound Transmission loss, Side Outlet.

I. INTRODUCTION

Mufflers are mostly used to reduce noise related with internal combustion engine exhausts, high pressure gas or steam vents, compressors and fans. These examples lead to the conclusion that a Muffler allows the passage of fluid while at the same time restricting the free passage of sound.[1] Mufflers might also be used where it is directly access to the interior of a noise containing enclosure is required, but through which no steady flow of gas is necessarily to be maintained. For example, an acoustically treated entry way between a noisy and a quiet area in a building or factory might be considered as a muffling device. [6] [7] Muffler may function in any one or any combination of three ways: they may suppress the generation of noise; they may attenuate noise already generated; and they may carry or redirect noise away from sensitive areas.

Sound waves propagating along a pipe can be attenuated using either a dissipative or a reactive muffler. A dissipative muffler uses sound absorbing material to take energy out of the acoustic motion in the wave, as it propagates through the muffler. Reactive silencers, which are commonly used in automotive applications, reflect the sound waves back towards the source and prevent sound from being transmitted along the pipe. Reactive silencer design is based either on the principle of a helmholtz resonator or an expansion chamber, and requires the use of acoustic transmission line theory [2] [3]. There are several parameters that describe the acoustic performance of a muffler and it is associated piping. These include the noise reduction (NR), the insertion loss (IL), and the transmission loss (TL) [4][5]. The Noise Reduction is the sound pressure level difference across the muffler.

II. OBJECTIVES AND MODELLING

For evaluation of transmission loss of muffler the volume of Expansion chamber is keeping constant then changing the expansion ratio of muffler. Here firstly validate the transmission loss measurement with experimentally and validate with the FEA result by using acoustical simulation tool which proves the compatibility of software.

Following design conditions are applied to analyzing the transmission loss of the simple expansion chamber:

1. Volume of the Expansion chamber is kept constant for all the modeling and designing work.
2. Modeling of circular expansion chamber by keeping the length of expansion chamber as constant i.e., 500 mm.
3. Modeling of circular expansion chamber by keeping the diameter of expansion chamber as constant i.e., 130 mm.
4. Modeling of circular expansion chamber by keeping the diameter of central inlet and central outlet tail pipe as constant i.e., 35 mm.
5. Modeling of circular expansion chamber by keeping the length of Inlet tail pipe and Outlet tail pipe as 100 mm.

III. VALIDATION EXPERIMENTAL AND FEA ACOUSTIC MODULE RESULTS

In our setup sound analyzer consists of two assemblies one for input signal (Green Color) and another for output signal (Red Color) appeared while it will attach with computer system. The differences of FFT of these two signals are analyzed in Matlab based sound spectrum software which is developed by author Dr. Amit Kumar Gupta. This provides Noise (dB) versus frequency plot of different frequency components present in the signal. Our circuit

provided the sensitivity, frequency and range selection facility shown in figure 1.



Figure 1: Muffler Transmission loss measurement setup with load

Following boundary condition are applied to muffler [8] [9]:

1. Gas Volume approximately: 6636500 mm³.
2. Exhaust gas Temperature: 300 K.
3. Exhaust Gas pressure: 1.0 bar.
4. Initial fluid composition: Fresh Air.
5. Upper frequency Limit: 3000 Hz.
6. Lower Frequency Limit: 25 Hz.

Model is prepared on wave build 3D with inlet and outlet boundary condition shown in figure 2.

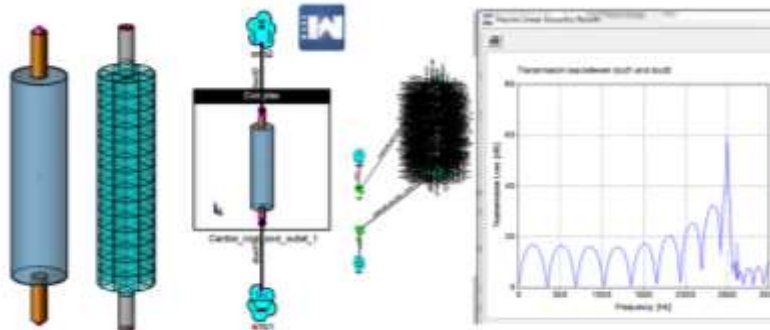


Figure 2: GUI for Post Processing of Wave 1-D.

IV. COMPARISON OF ALL THE RESULTS

TL curves represent among five observations clearly shows that by the comparison with five results transfer matrix method, analytical, experimental (two load method) and FEA tools like Ricardo wave 1-D & cosmol the transmission loss are equally are comparable. Small deviation is appeared with FEA tool is due to meshing parameter.[4] Comparison of additional FEA tools like wave 1-D and cosmol results shows the good agreement between existing TMM and analytical method. Now any shape of muffler can be modeled to predict the TL measurement. In recent scenario so many complicated geometry where the practical analysis proves too expensive and complicated. Therefore the FEA Tool can be the best approach to achieve the expected outcomes regarding the transmission loss of Muffler.


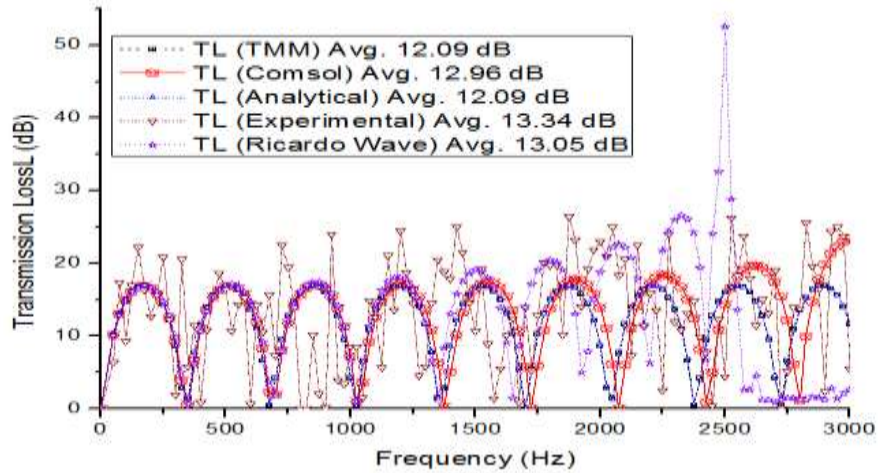


Figure 3: Result comparison of TL for all method

V. INCLINATION OF SIDE OUTLET TAIL PIPE OF MUFFLER

The tail pipe is inclined 0°, 15°, 30°, 45° and 60° to observe the muffler transmission loss.

Case I: Side outlet Tail pipe is inclined 0°

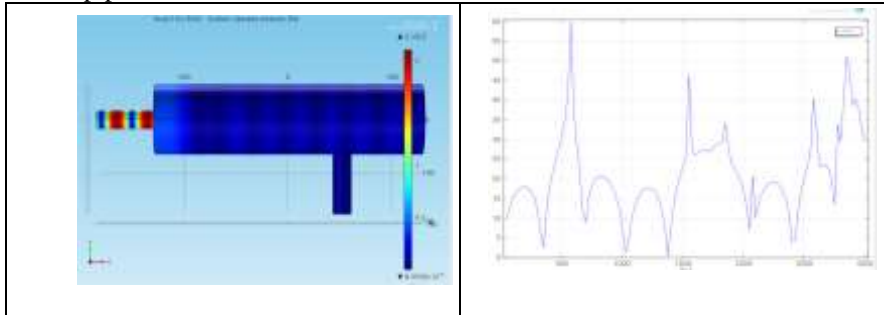

Case II: Side outlet Tail pipe is inclined 15°

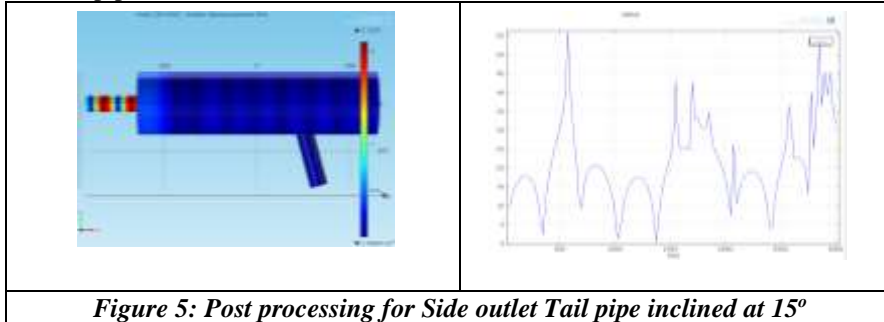


Figure 5: Post processing for Side outlet Tail pipe inclined at 15°

Case III: Side outlet Tail pipe is inclined 30°

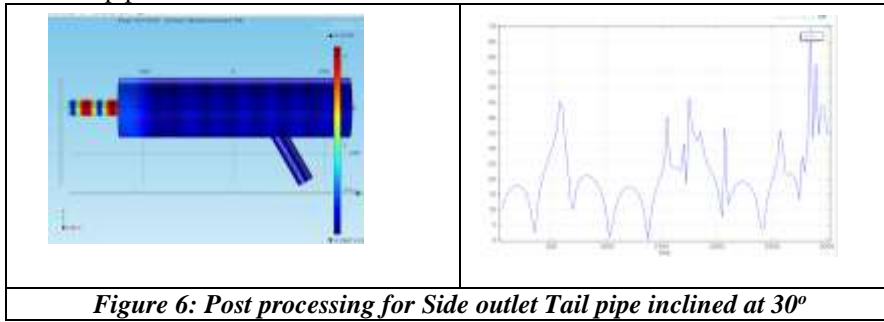


Figure 6: Post processing for Side outlet Tail pipe inclined at 30°

Case IV: Side outlet Tail pipe is inclined 45°

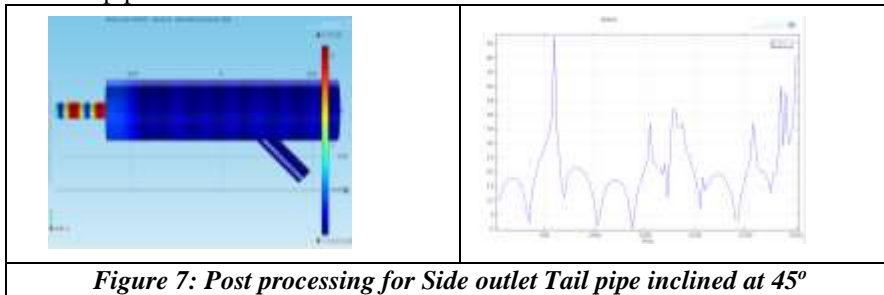


Figure 7: Post processing for Side outlet Tail pipe inclined at 45°

Case V: Side outlet Tail pipe is inclined 60°

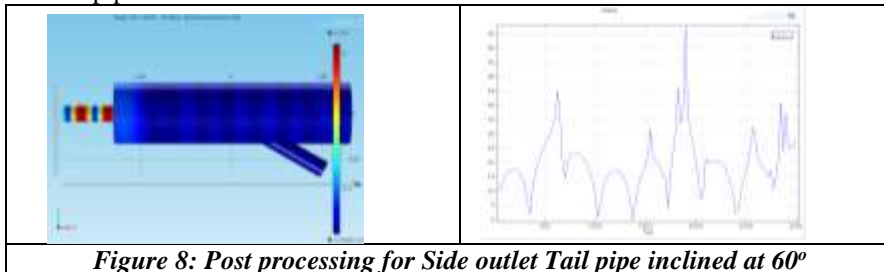


Figure 8: Post processing for Side outlet Tail pipe inclined at 60°

VI. RESULTS AND DISCUSSION

The following results were observed for the muffler transmission loss performance.

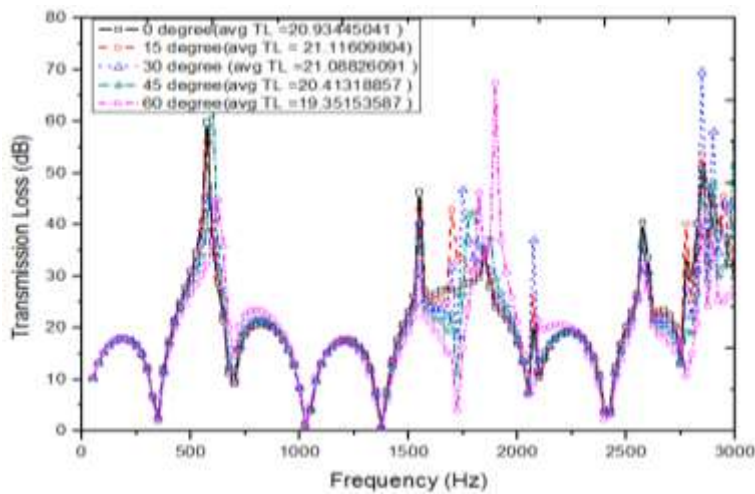


Figure 9: Observation of TL when tail pipe is inclined 0o, 15o, 30o, 45o and 60o

The effect of transmission loss by inclining the tail pipe in the angle of 0°, 15°, 30°, 45° and 60° respectively shows that maximum Transmission Loss is achieved in case of 15° of inclination with TL 21.11 dB as compared to other cases having same volume of expansion chamber.

VII. REFERENCES

- [1] Amit Kumar Gupta, Dr. Ashesh Tiwari “Acoustic Characterization of Reactive Mufflers by Different Cross Sections Using One-Dimensional Analysis” Paripex - Indian Journal Of Research Vol 2 , Issue 3 , March 2013.
- [2] Gupta A.K. and Tiwari A.,” Measurement of Sound Transmission Loss on Straight and Zigzag Perforated Concentric Tube Muffler with Constant Porosity”, International Journal on Emerging Technologies, ISSN 2250–2459, Volume 6, Issue 1, pp 35-40, 2015.
- [3] M.L. Munjal, “Acoustics of Ducts and Mufflers”, John Wiley & Sons, (1987).
- [4] Amit Kumar Gupta, Dr. Ashesh Tiwari “Modeling For Transmission Loss Prediction Of Different Shapes Of Acoustic Muffler With An Experimental Analysis ” Journal Of Experimental & Applied Mechanics, Vol 6, No 1 (2015).
- [5] Amit Kumar Gupta, Dr. Ashesh Tiwari “Comparison of Existing Experimental Results with Different Types of Simulation Software for Transmission Loss Estimation of Muffler”, March 2015(Pp 17-20),Volume 2, Issue 1,Trends in Machine Design, March 2015.
- [6] Chu Zhigang, Kuang Fang, Gao Xiaoxin, Kang Runcheng “Effects of outlet pipe transition circular arc on properties of reactive muffler and its application”, Transactions of the Chinese Society of Agricultural Engineering Vol.31 ,No.6, Mar. 2015.
- [7] Lima K., Arcanjo Lenzi, Renato Barbieri, “The study of reactive silencers by shape and parametric optimization techniques”, Applied Acoustics, pp 142-150, (2011).
- [8] Amit Kumar Gupta, Dr. Ashesh Tiwari “Comparison of Existing Experimental Results with Different Types of Simulation Software for Transmission Loss Estimation of Muffler”, March 2015(Pp 17-20),Volume 2, Issue 1,Trends in Machine Design, March 2015.
- [9] Chu Zhigang, Kuang Fang, Gao Xiaoxin, Kang Runcheng “Effects of outlet pipe transition circular arc on properties of reactive muffler and its application”, Transactions of the Chinese Society of Agricultural Engineering Vol.31 ,No.6, Mar. 2015.